


Technical Specification



Item	Technical Specification
Frequency Range	8.5-9.5GHz
VSWR	1.3 max
Insertion Loss	0.6dB max
Isolation	18dB min
Forward Power	10W
Reverse Power	1W
Waveguide	WR90
Flange	FBP100
Material	Al
Operating Temp.	-40°C~+70°C

Outline Drawing (Size: mm)

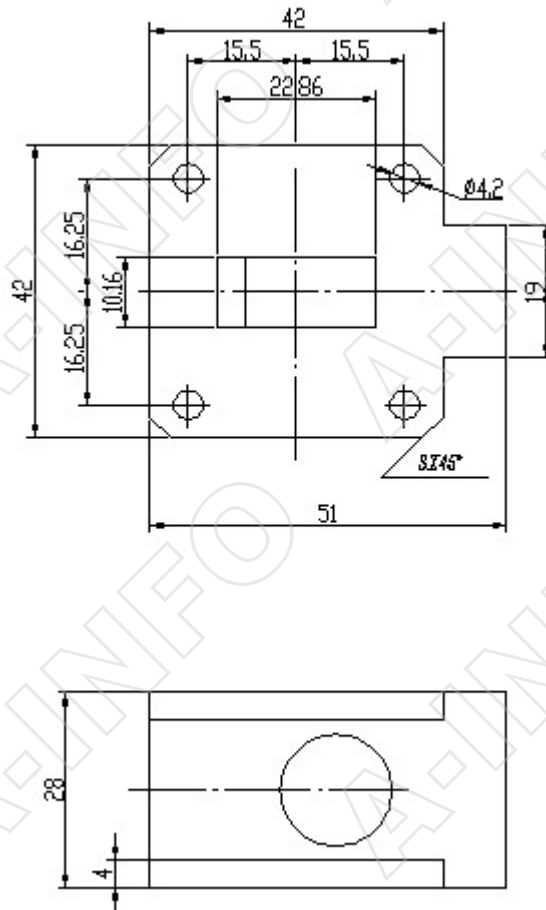

Test Results

