



Technical Specification



Frequency Range(GHz)	8.2 - 12.4
Waveguide	WR90
Gain(dBi)	15 Typ.
Polarization	Linear
3dB Beamwidth(deg)	E Plane: 25 Typ.
	H Plane: 30 Typ.
Cross Pol. Isolation(dB)	40 Typ.
VSWR	A Type: 1.25:1 Max.
	C Type: 1.50:1 Max.
Output	A Type: FBP100(UBR100)
	SMA-Female or N-Female or TNC-Female or 7mm or 3.5mm-Female
Material	Al
Size(mm)	A Type: 66 x 66 x 222
	C Type: 66 x 66 x 260
Net Weight(Kg)	A Type: 0.29 Around
	C Type: 0.39 Around



Outline Drawing (Size: mm)

FBP100 Output (P/N: LB-CNH-90-15-A)

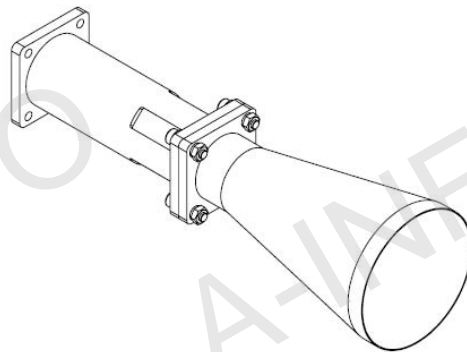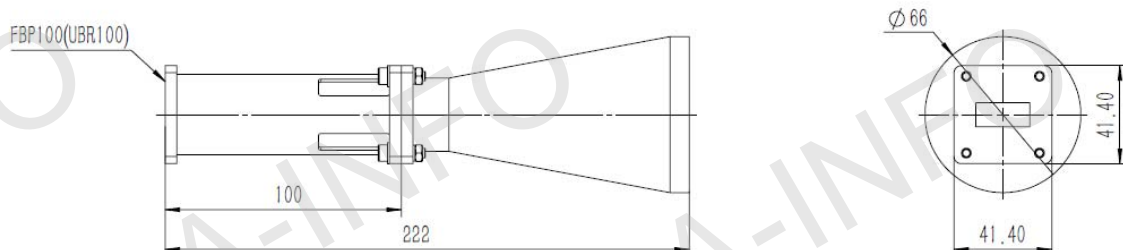



SMA-Female Output (P/N: LB-CNH-90-15-C-SF)

For N-Female, TNC- Female, 7mm or 3.5mm-Female output outline drawing, please contact A-INFO.

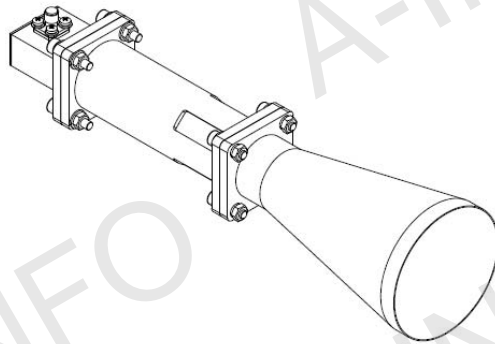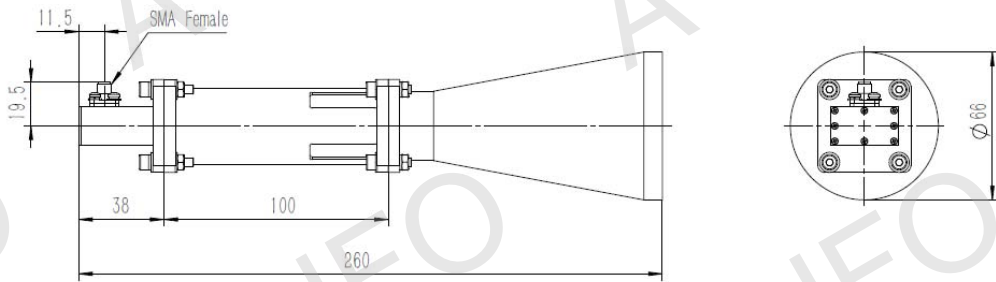


SMA-Female Output with Round Mounting Bracket (Option, P/N: LB-CNH-90-15-MB)

For N-Female, TNC- Female, 7mm or 3.5mm-Female output outline drawing, please contact A-INFO.

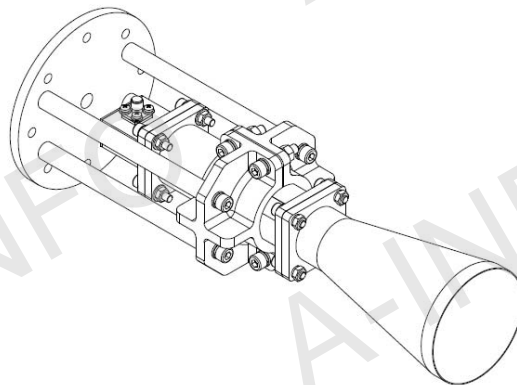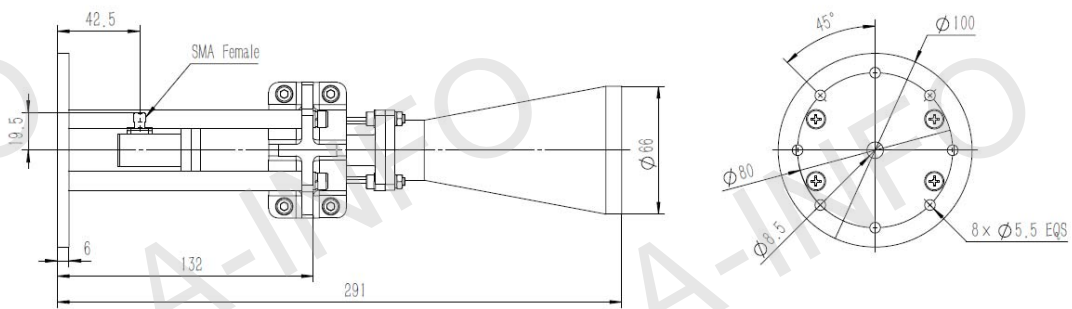


SMA-Female Output with L Type Mounting Bracket (Option, P/N: LB-CN-90-15-MBL)

For N-Female, TNC- Female, 7mm or 3.5mm-Female output outline drawing, please contact A-INFO.

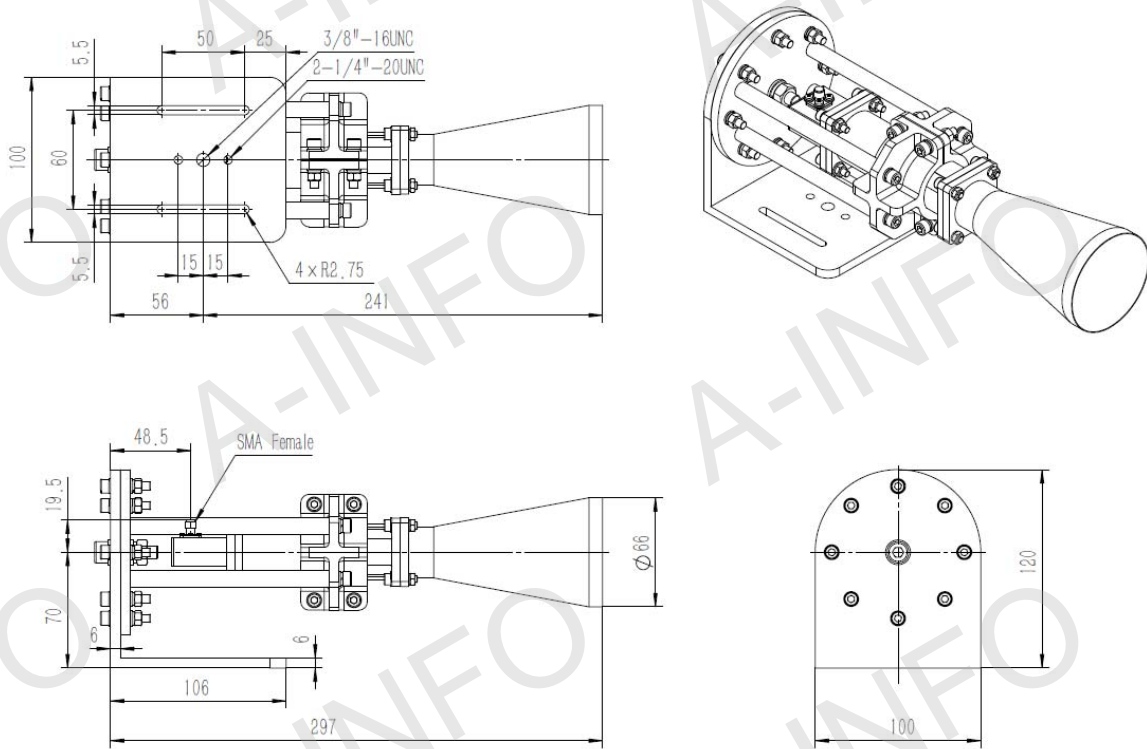

Flange Drawing (Size: mm)

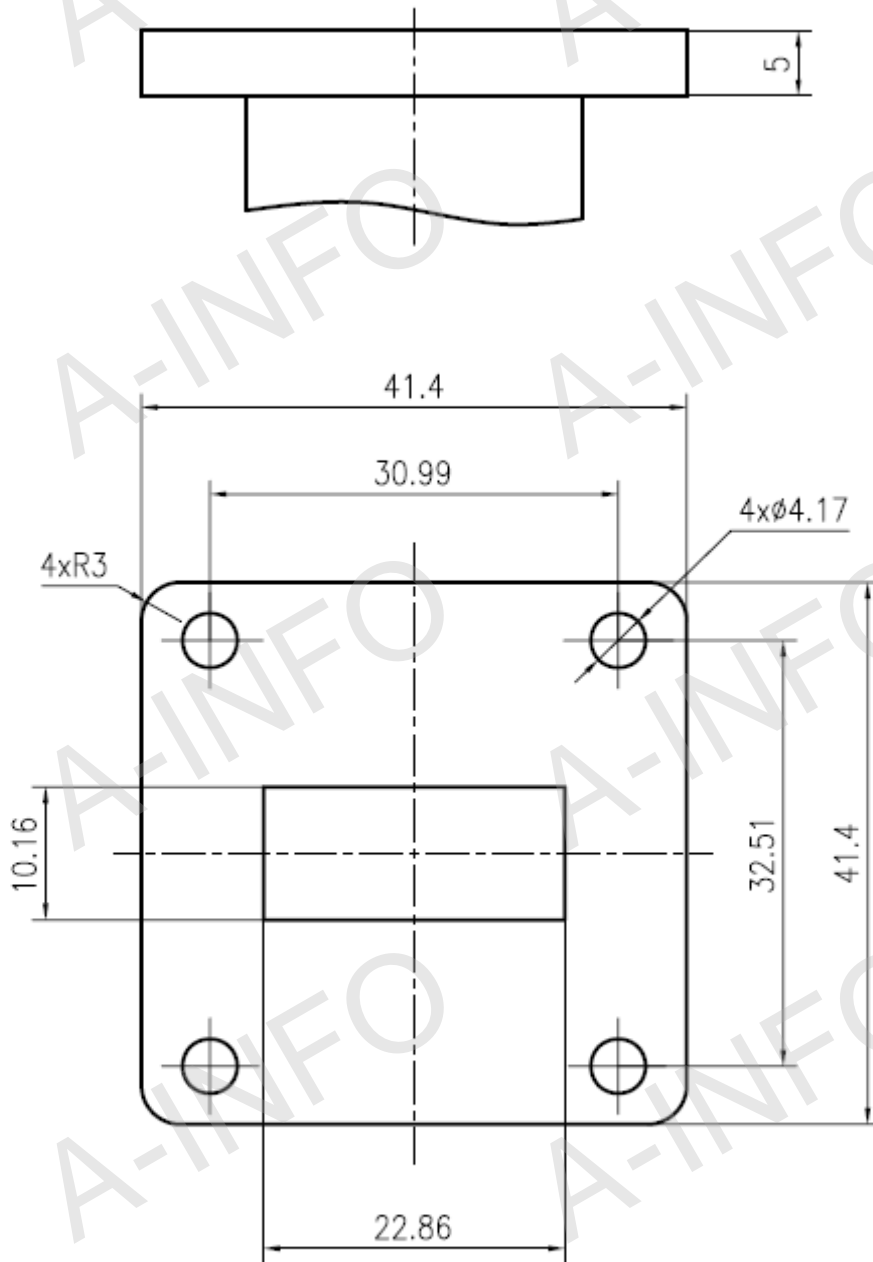

FBP100

AINFO Inc.

Page 4 of 9

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,



(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670


Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Results

1. Gain & Antenna Factor

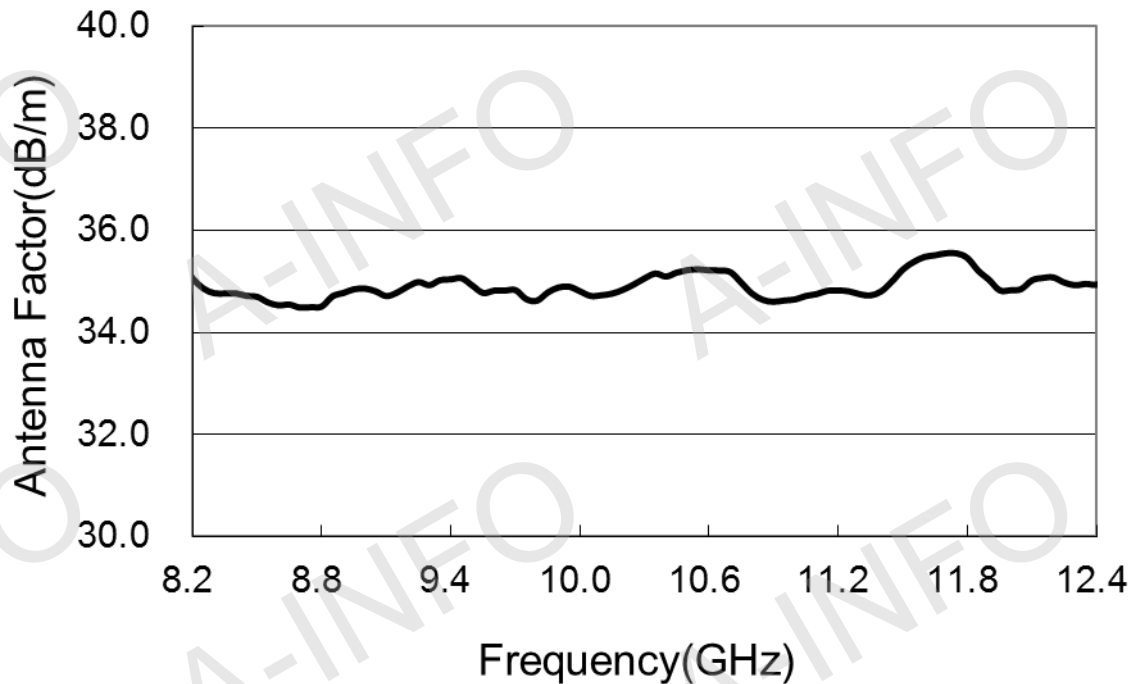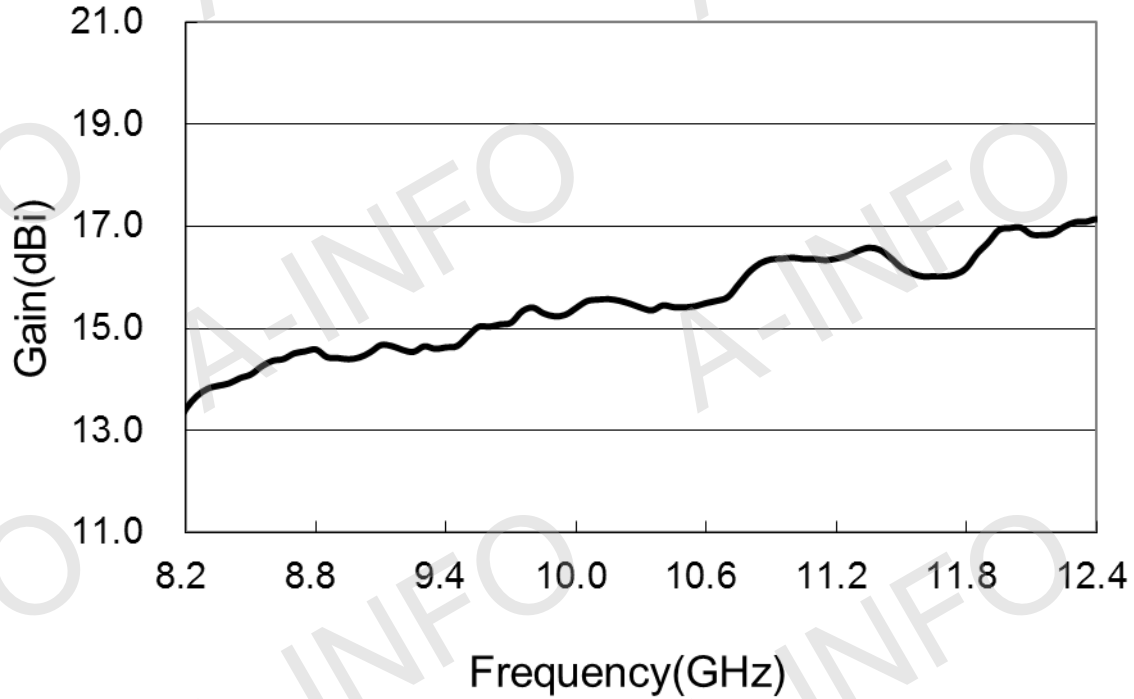


2. Cross Polarization Isolation

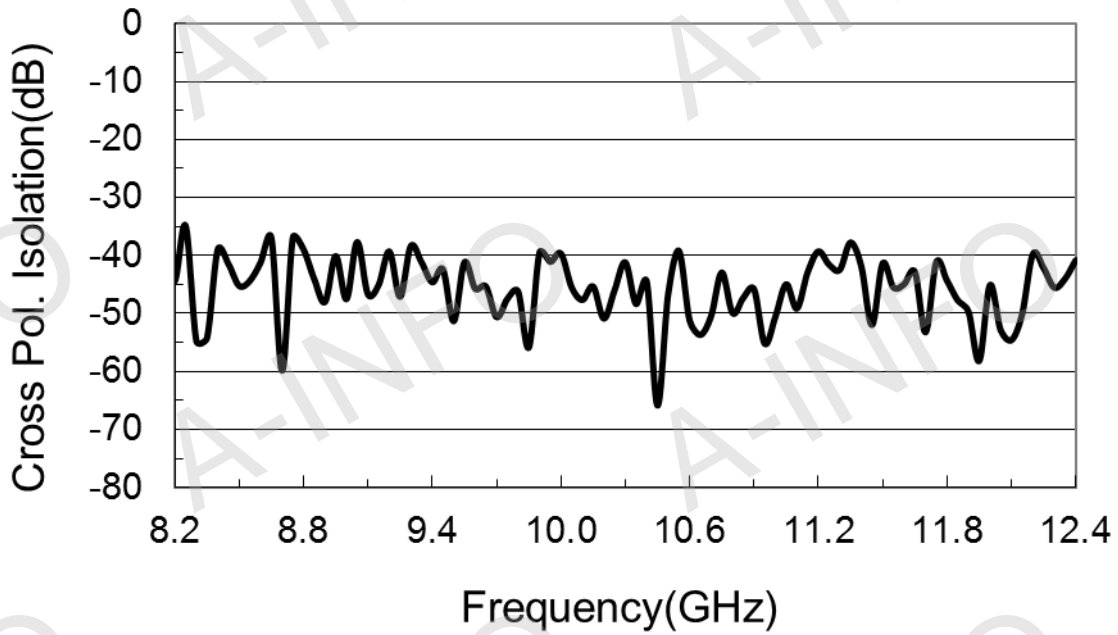

3. VSWR_A Type



VSWR_C Type

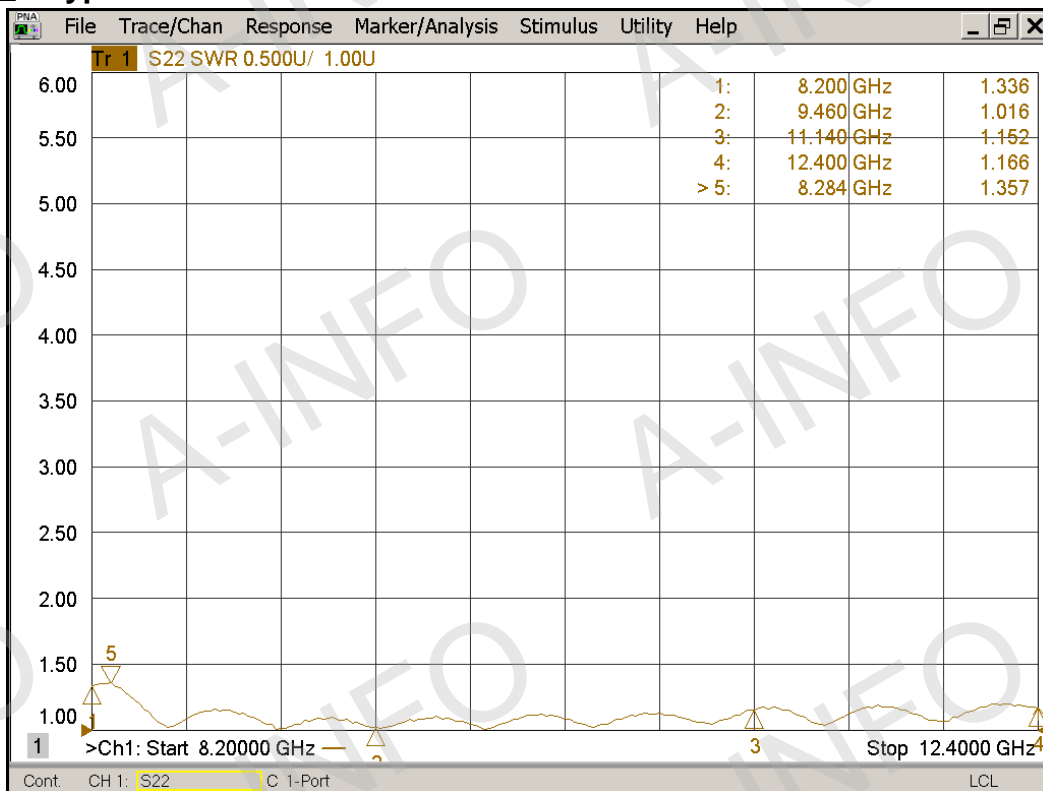

4. Pattern

